

# BaleMaster (GRN6165)

## Digital Instrument for Rapid Assessment of Moisture Levels in Straw and Hay Bales

The Protimeter Digital BaleMaster is a hand-held instrument which displays results on a large LCD Digital Display. It is supplied with a durable 600mm (24") stainless steel probe designed to reach the center of large bales.



### Features

- Measurement range: 8.5% - 36.8%
- Strong, robust stainless steel moisture probe
- Easy to read digital display
- Colour arc LED display to show moisture condition:
  - Green (Dry)
  - Yellow (At Risk)
  - Red (Wet)
- Dual display LCD and LED for easy reading
- Audible tone



# BaleMaster Specifications

## Operating Conditions:

- Operating temperature range: 0°C to 50°C
- Humidity: 0 to 90% RH, non-condensing

## Measurement Range:

- 8.5% to 36.8%
  - Green (Dry) 8.5-15%
  - Yellow (At Risk) 15.1-19.5%
  - Red (Wet) 19.6 - 36.8%

## Power:

- 3V (2 x AA) 2700mAh

## Dimensions and Weight

- Size: 177mm x 63mm x 35mm (7" x 2.5" x 1.4")
- Gross Weight: 220g

## Probe Dimensions:

- Length 5584mm (23")
- Diameter 10mm (0.4")

## Buzzer:

- Multi tone indication for moisture level with turn On/Off feature

## Regulatory Compliance:

- CE, RoHS, ETL, FCC, UKCA, R-NZ

## Warranty:


- 2 years on manufacturing defects. Does not include wearing parts or accessories

## Part Numbers:

- GRN6170 - Balemaster instrument
- GRN6148 - Balemaster probe

## Protimeter Connect App:

- Protimeter devices with Bluetooth are able to use the free Protimeter Connect App. The app allows users to record measurement readings and photos.

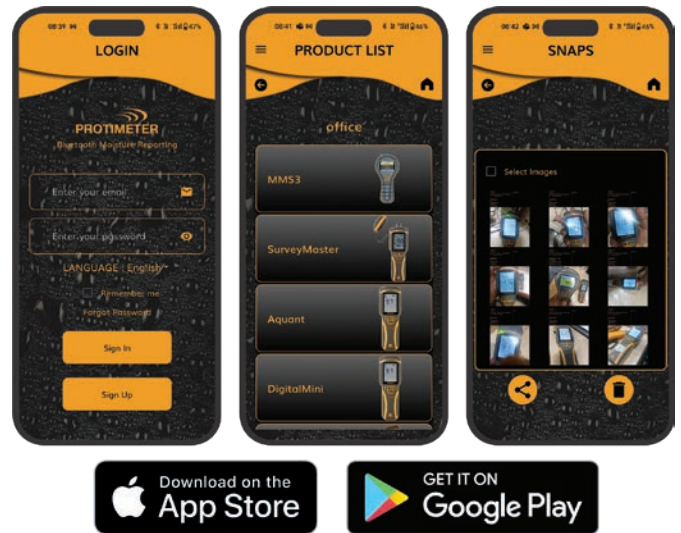

**Amphenol**  
Advanced Sensors

[www.protimeter.com](http://www.protimeter.com)

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2024 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.